


codice articolo

SDLNBDCSS



Caratteristiche tecniche:

- LNB 16 USER BAND
- MODALLITA' DINAMICA
- ALTA POTENZA IN USCITA
- BASSA FIGURA DI RUMORE
- CONNESSIONE CON PIU' DI 16UB

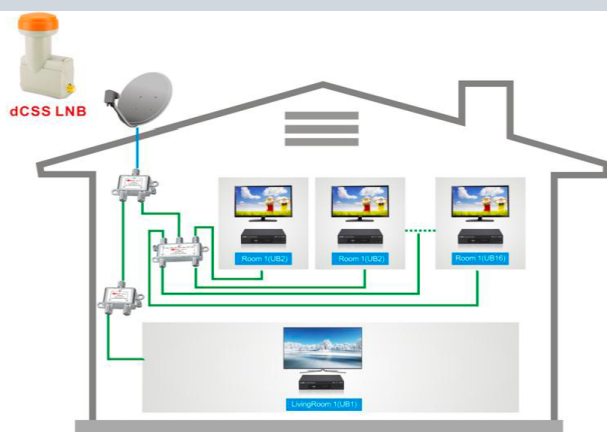

Parameter	Specification
Input RF Frequency	10.7 ~ 12.75 GHz (Ku Band)
Output IF Frequency	950-2150 MHz
Local Oscillator Frequency	9.75/10.6Ghz
L.O Phase Noise (dBc/Hz)	-60@1KHz、-75@10KHz、 -95@100KHz、-105@1MHz、 - 115@10MHz
L.O Frequency Stability	± 1MHz (Typ @25°C) ± 3MHz (Max @-40°C~60°C)
Noise Figure	0.3 dB
Gain Ripple	1 dB (26MHz BW)
6 dB (Full Bandwidth)	
Cross Polar Discrimination	20 dB (Min) 25 dB (Typ)
Image Rejection	40 dB (Min) 45 dB (Typ)



User Band	IF Frequency (MHz)	Protocol
1	1210	EN50494+EN50607
2	1420	EN50494+EN50607
3	1680	EN50494+EN50607
4	2040	EN50494+EN50607
5	985	EN50494+EN50607
6	1050	EN50494+EN50607
7	1115	EN50494+EN50607
8	1275	EN50494+EN50607
9	1340	EN50607
10	1485	EN50607
11	1550	EN50607
12	1615	EN50607
13	1745	EN50607
14	1810	EN50607
15	1875	EN50607
16	1940	EN50607

Space Digital s.r.l

Via Triumplina 28, 25123 Brescia, Tel.: +39 030 29 30 06 - Fax.: + 39 030 29 30 81

www.corelitaly.it